

Cilindro



FEATURES

- Australian designed and manufactured from high quality materials
- Energy efficient
- Customise colour to suit any décor
- Contemporary design for modern interior
- High quality VS LED components

OPTIONS

- Dimmable
- 25° beam angle
- Custom size (MOQ's apply)
- Colour options for housing
- Flex colour: white, black or clear

LUMINAIRE CONSTRUCTION


- Powder-coated aluminium extruded and machined housing
- VS LEDSpot ActiveLine 1000 with built-in reflector and aluminium heat sink
- Clear lens to protect reflector
- Powder-coated ceiling canopy
- Machined aluminium suspension fittings

ALL MODELS

- 240VAC 50HZ input (198-264VAC and over voltage protection)
- Mounting: surface mount or suspended

SUGGESTED APPLICATIONS

- Cafes and restaurants
- Foyers
- Kitchens
- Retail displays
- Stairwells

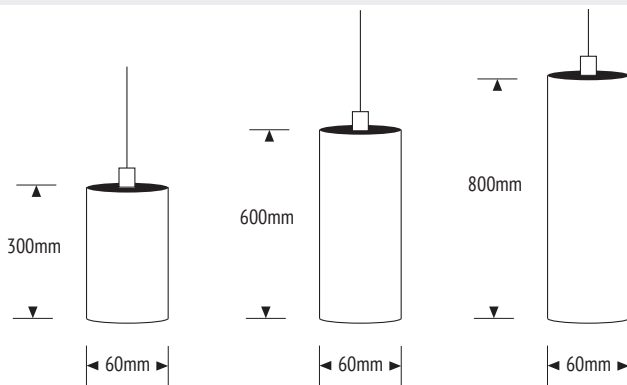

| Model | Beam Angle | Light Source/ Lamp | Lumen Luminaire (lm) | Power Lamp (W) | Power Luminaire (W) | Colour Temp (°K) | Colour Rendering Index (CRI) | Power Factor | LED Qty | LED Type | LED Brand | IP Rating | Dimensions (mm) | | Weight (kg) |
|--------------------|------------|--------------------|----------------------|----------------|---------------------|------------------|------------------------------|--------------|---------|----------|-----------|-----------|-----------------|-----|-------------|
| | | | | | | | | | | | | | Ø | H | |
| CIL60LED7W300-830 | 40° | LED | 730 | 7 | 10 | 3000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 300 | 0.7 |
| CIL60LED7W300-840 | 40° | LED | 750 | 7 | 10 | 4000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 300 | 0.7 |
| CIL60LED10W300-830 | 40° | LED | 1000 | 10 | 13 | 3000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 300 | 0.7 |
| CIL60LED10W300-840 | 40° | LED | 1045 | 10 | 13 | 4000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 300 | 0.7 |
| CIL60LED7W600-830 | 40° | LED | 730 | 7 | 10 | 3000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 600 | 1.1 |
| CIL60LED7W600-840 | 40° | LED | 750 | 7 | 10 | 4000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 600 | 1.1 |
| CIL60LED10W600-830 | 40° | LED | 1000 | 10 | 13 | 3000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 600 | 1.1 |
| CIL60LED10W600-840 | 40° | LED | 1045 | 10 | 13 | 4000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 600 | 1.1 |
| CIL60LED7W800-830 | 40° | LED | 730 | 7 | 10 | 3000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 800 | 1.6 |
| CIL60LED7W800-840 | 40° | LED | 750 | 7 | 10 | 4000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 800 | 1.6 |
| CIL60LED10W800-830 | 40° | LED | 1000 | 10 | 13 | 3000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 800 | 1.6 |
| CIL60LED10W800-840 | 40° | LED | 1045 | 10 | 13 | 4000 | >80 | 0.97 | n/a | COB | VS | IP20 | 60 | 800 | 1.6 |

MADE IN AUSTRALIA



5 year warranty. Refer to warranty card.

Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.